

ALL-BLACK CS6P-260 | 265M

High quality and reliability in all Canadian Solar modules is ensured by 13 years' experience in module manufacturing, well-engineered module design, stringent BOM quality testing, an automated manufacturing process and 100% EL testing.

KEY FEATURES



Excellent module efficiency
up to 16.47%



Outstanding low irradiance
performance > 96.5%



Positive power tolerance
up to 5 W



High PTC rating up to 91.36%



Anti-glare module surface
available



IP67 junction box for long-term
weather endurance



Heavy snow load up to 5400 Pa
wind load up to 2400 Pa



Salt mist resistance,
for seaside environment



insurance-backed warranty
non-cancellable, immediate warranty insurance
linear power output warranty



product warranty on materials
and workmanship

MANAGEMENT SYSTEM CERTIFICATES

ISO 9001: 2008 / Quality management system

ISO/TS 16949:2009 / The automotive industry quality management system

ISO 14001:2004 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health and safety

PRODUCT CERTIFICATES

IEC 61215 / IEC 61730: VDE / CE / MCS / CEC AU/ INMETRO

UL 1703 / IEC 61215 performance: CEC listed (US) / FSEC (US Florida)

UL 1703: CSA / IEC 61701 ED2: VDE / PV CYCLE (EU)




CANADIAN SOLAR INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading manufacturer of solar modules and PV project developer with about 8 GW of premium quality modules deployed around the world since 2001, Canadian Solar Inc. (NASDAQ: CSIQ) is one of the most bankable solar companies worldwide.

CANADIAN SOLAR INC.


545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, www.canadiansolar.com, support@canadiansolar.com

MODULE / ENGINEERING DRAWING (mm)


Rear View

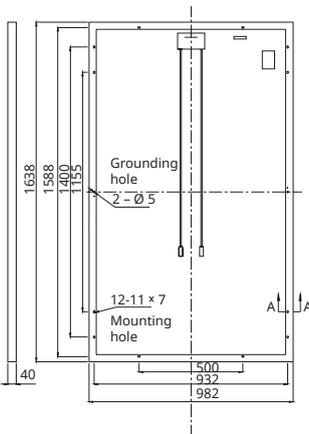

Frame Cross Section A-A



Mounting Hole



ELECTRICAL DATA / STC*

Electrical Data CS6P	260M	265M
Nominal Max. Power (Pmax)	260 W	265 W
Opt. Operating Voltage (Vmp)	30.7 V	30.9 V
Opt. Operating Current (Imp)	8.48 A	8.61 V
Open Circuit Voltage (Voc)	37.8 V	37.9 V
Short Circuit Current (Isc)	8.99 A	9.11 A
Module Efficiency	16.16 %	16.47 %
Operating Temperature	-40°C ~ +85°C	
Max. System Voltage	1000 V (IEC) or 600V (UL)	
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC61730)	
Max. Series Fuse Rating	15 A	
Application Classification	Class A	
Power Tolerance	0 ~ + 5 W	

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL DATA / NOCT*

Electrical Data CS6P	260M	265M
Nominal Max. Power (Pmax)	188 W	191 W
Opt. Operating Voltage (Vmp)	28.0 V	28.2 V
Opt. Operating Current (Imp)	6.70 A	6.79 A
Open Circuit Voltage (Voc)	34.7 V	34.8 V
Short Circuit Current (Isc)	7.28 A	7.37 A


* Under Nominal Operating Cell Temperature (NOCT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

PERFORMANCE AT LOW IRRADIANCE

Industry leading performance at low irradiation, +96.5% module efficiency from an irradiance of 1000 W/m² to 200 W/m² (AM 1.5, 25°C).

As there are different certification requirements in different markets, please contact your sales representative for the specific certificates applicable to your products. The specification and key features described in this Datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, Canadian Solar Inc. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

CS6P-265M / I-V CURVES

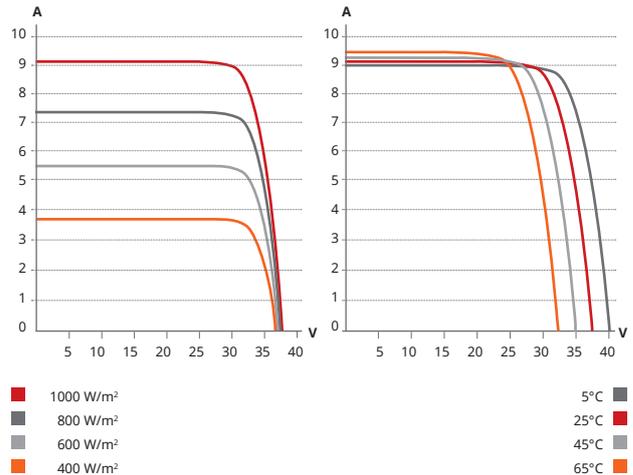

MODULE / MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline, 6 inch
Cell Arrangement	60 (6 × 10)
Dimensions	1638×982 × 40 mm (64.5×38.7×1.57 in)
Weight	18 kg (39.7 lbs)
Front Cover	3.2 mm tempered glass
Frame Material	Anodized aluminium alloy
J-BOX	IP67, 3 diodes
Cable	4 mm ² (IEC) or 12 AWG (UL), 1000 mm
Connectors	MC4 or MC4 comparable
Stand. Packaging	24 pcs, 480 kg (quantity & weight per pallet)
Module Pieces per Container	672 pcs (40'HQ)

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.45 % / °C
Temperature Coefficient (Voc)	-0.35 % / °C
Temperature Coefficient (Isc)	0.060 % / °C
Nominal Operating Cell Temperature	45±2°C

PARTNER SECTION

