





-  IN-ROOF AND ROOFTOP ARRAYS ON RESIDENTIAL BUILDINGS
-  IN-ROOF/ROOFTOP ARRAYS ON SMALL TO MEDIUM-SIZED COMMERCIAL AND INDUSTRIAL BUILDINGS
-  FACADE INSTALLATIONS
-  ROOF-PARALLEL FLAT ROOF-INSTALLATIONS

CIGS SOLAR MODULE

Q.SMART UF 70-90

Sophisticated design for a broad range of applications

Q-Cells is now applying the skills perfected over years of solar cell manufacture to solar module production. The frameless **Q.SMART UF** solar modules offer the world's highest efficiency for thin-film modules. The reliable „Made in Germany“ quality and the particularly appealing design qualify them for rooftop arrays and building-integrated installations alike.

QUALITY „MADE IN GERMANY“ FOR HIGHLY RELIABLE YIELDS:

- World's best efficiencies of up to 12.3 % *
- High yields due to good temperature behavior and low-light performance
- Particularly efficient, even in cases of partial shading and unfavorable roof orientation, thanks to advantageous cell geometry
- Long-term weather resistance due to durable glass encapsulation
- Efficient self-cleaning due to lack of raised edges
- Further optimization of output due to positive sorting +5/-0 Wp

ATTRACTIVE AND AESTHETICAL VISUAL APPEARANCE:

- Outstanding design with homogeneous black surface and black edge sealing

SIMPLE, COST-EFFECTIVE INSTALLATION:

- Mounting options for every inclination – from flatroofs to facades
- Minimal wiring effort required, as the module itself has high reverse current resistance

STEADY, GUARANTEED PERFORMANCE:

- 10-year product warranty
- 25-year performance warranty**
- Free module recycling through membership in the PV Cycle Association***



* FOR THIN-FILM MODULES IN MASS PRODUCTION
** 90% OF THE INITIAL EFFICIENCY UP TO 10 YEARS, 80% UP TO 25 YEARS
*** IN PV CYCLE MEMBER COUNTRIES ONLY, SEE WWW.PVCYCLE.COM

MECHANICAL SPECIFICATION		TECHNICAL DRAWING
Format	1190 mm x 630 mm x 7.3 mm	
Weight	13.2 kg	
Front Cover	4 mm tempered low iron glass	
Back Cover	3 mm float glass	
Frame	None	
Cell Type	CIGS [Cu(In, Ga) Se ₂]	
Junction box	Protection class IP 65, with bypass diode	
Cable length	(+) 770 mm; (-) 650 mm	
Cable type	Solar cable 1.5 mm ²	
Connector	MC4	

ELECTRICAL CHARACTERISTICS


PERFORMANCE AT STANDARD TEST CONDITIONS (STC: 1000 W/m², 25 °C, AM 1.5 SPECTRUM)¹

POWER CLASS			70	75	80	85	90
Nominal Efficiency	η	[%]	9.3	10.0	10.7	11.3	12.0
Nominal Power (+5/-0 Wp)	P_{MAX}	[W]	70.0	75.0	80.0	85.0	90.0
Short Circuit Current	I_{SC}	[A]	1.66	1.66	1.67	1.68	1.69
Open Circuit Voltage	V_{OC}	[V]	69.1	70.5	71.8	73.1	75.1
Current at Maximum Power	I_{MPP}	[A]	1.40	1.42	1.46	1.49	1.52
Voltage at Maximum Power	V_{MPP}	[V]	50.2	52.7	54.8	57.2	59.2


PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800 W/m², 51±2 °C, AM 1.5 SPECTRUM)

POWER CLASS			70	75	80	85	90
Nominal Power	P_{MAX}	[W]	50.7	54.3	57.9	61.5	65.1
Short Circuit Current	I_{SC}	[A]	1.32	1.33	1.33	1.34	1.35
Open Circuit Voltage	V_{OC}	[V]	62.8	64.1	65.2	66.5	68.3
Current at Maximum Power	I_{MPP}	[A]	1.11	1.13	1.16	1.18	1.21
Voltage at Maximum Power	V_{MPP}	[V]	45.5	47.8	49.7	51.8	53.7

PERFORMANCE AT LOW IRRADIANCE | CHARACTERISTICS AT DIFFERENT TEMPERATURES AND IRRADIANCES

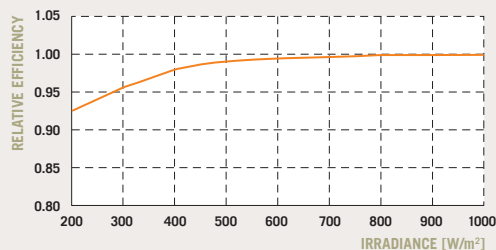

The typical relative change in module efficiency at an irradiance of 200 W/m² in relation to 1000 W/m² (both at 25 °C and AM 1.5 spectrum) is -7%.

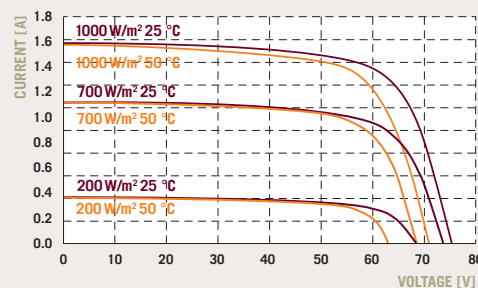

TEMPERATURE COEFFICIENTS (AT 1000 W / M², AM 1.5 SPECTRUM)

Temperature Coefficient of I_{SC}	α	[%/K]	- 0.01 ± 0.04	Temperature Coefficient of V_{OC}	β	[%/K]	- 0.30 ± 0.04
Temperature Coefficient of P_{MAX}	γ	[%/K]	- 0.38 ± 0.04				

¹⁾ The power classes are defined by positive sorting (+5W/-0W) according to measured P_{max} under STC. The accuracy of this measurement is ±3%. I_{sc} , V_{oc} , I_{mp} , V_{mp} are within ±10% of the indicated values under STC. Valid indoor measurement of STC performance is obtained by pretreating the modules before measurement with 1 hour light soak (at approx. 1000 W/m² in open circuit) followed by cool down to 25 °C.

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V_{SYS}	[V]	1000 (IEC) / 600 (UL 1703)	Safety Class	II
Maximum Reverse Current I_R	[A]	6.5	Fire Rating	C
Wind / Snow Load	[Pa]	2400		

QUALIFICATIONS AND CERTIFICATES | PARTNER

IEC 61646 (Ed. 2); IEC 61730 (Ed. 1) Application Class A; ISO 9001:2008



NOTE: Installation instructions must be followed. See the installation and operating manual or contact the technical service for further information on approved installation and use of this product.

Q-CELLS SE

OT Thalheim, Sonnenallee 17–21
06766 Bitterfeld-Wolfen, Germany

TEL +49 (0)3494 66 99-0
FAX +49 (0)3494 66 99-199

EMAIL modules@q-cells.com
WEB www.q-cells.com

