



Monocrystalline PV module

72 cells (with SOLRIF frame)



Electrical Characteristics

Model	UP-M165M	UP-M170M	UP-M175M	UP-M180M	UP-M185M	UP-M190M
Max Power Pm (W)	165	170	175	180	185	190
Max Power Voltage Vm (V)	35.2	35.4	35.6	35.8	36.0	36.3
Max Power Current Im (A)	4.69	4.81	4.92	5.03	5.14	5.23
Open-Circuit Voltage Voc (V)	44.0	44.2	44.4	44.6	44.8	45.1
Short-Circuit Current Isc (A)	5.03	5.19	5.29	5.38	5.43	5.55
Cell Efficiency	15.7%	16.2%	16.7%	17.2%	17.6%	18.1%
Module Efficiency	12.9%	13.3%	13.7%	14.1%	14.5%	14.8%
Maximum System Voltage (V)	1000 (TUV) / 600 (UL)					
Power Tolerance	± 3%					
Series Fuse Rating (A)	15					

Components & Mechanical Data

Front Glass	High Transparency Tempered Glass, 4.0 mm - Saint Gobain (Albarino) // Pilkington
Junction Box	Huber+Suhner (IP 67) Radox RH3 // Tyco , 1740971-1
Bypass Diode	3 diodes - ST STPS1545CG // Diotec SL1515
Output Cables	Cable Tyco 1m, ZHSCG (4mm ² and 12AWG), IEC and UL approved
Connectors	MC4 // Tyco , IP67, IEC and UL approved
Frame	SOLRIF XL
Encapsulation Material	EVA (0.50 ± 0.03mm thickness)
Back Foil	White TPT (0.32 ± 0.03mm thickness)
Silicone Sealant	Transparent
Temperature Range	-40°C to +90°C
Max Load	5400 Pa
Impact Resistance	Steel ball - 535g dropped from 1.3m high

Components subject to changes according to availability and market conditions.



Specifications

Cells	Monocrystalline silicon solar cells 125x125mm
Number of cells	72 (6x12)
Dimensions (mm)	1624 x 834
Weight (kg)	17.3

Temperature Coefficients

NOCT (°C)	45±2
Temperature Coefficient of Isc (%/°C)	0.05±0.01
Temperature Coefficient of Voc (%/°C)	-0.32±0.02
Temperature Coefficient of Im (%/°C)	-0.02±0.02
Temperature Coefficient of Vm (%/°C)	-0.42±0.03
Temperature Coefficient of Pm (%/°C)	-0.43±0.05

IV Curves

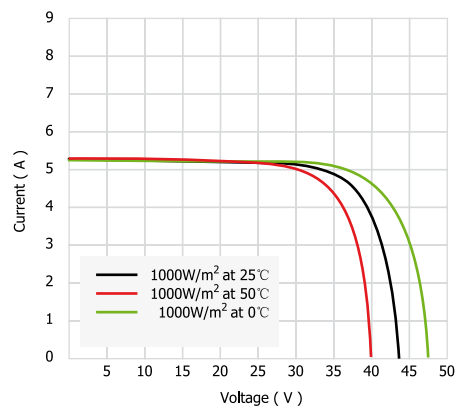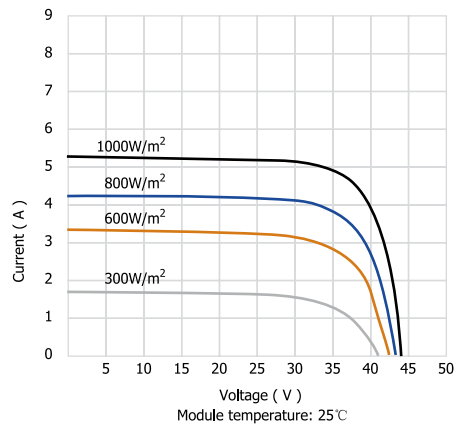

NOTE

- STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5
- Nominal Operating Cell Temperature above data is only for reference
- Deviation of Vm(V), Im(A), Voc(V) and Isc(A) of ±10%

GUARANTEE

- 5-year** product guarantee
- 10-year** performance guarantee at 90% power output
- 25-year** performance guarantee at 80% power output

